

RESOLUTION 3840 x 2160	THROW RATIO 0.8
THROW DISTANCE 1.6 - 11.5 ft / 0.5 - 3.5 m	BRIGHTNESS (LUMENS) 2,400 LED

DISPLAY	
TYPE DLP LED	RESOLUTION TYPE 4K (3840x2160)
RESOLUTION 3840 x 2160	BRIGHTNESS (LUMENS) 2,400 LED
DISPLAY SIZE (IN.) 30 - 200 in. / 0.7 – 5.1 m	THROW DISTANCE 1.6 - 11.5 ft / 0.5 - 3.5 m
THROW RATIO 0.8	KEYSTONE Vertical (+/- 40°)
LENS Fixed Zoom	LIGHT SOURCE (WATT) RGBB LED
LIGHT SOURCE LIFE, NORMAL (HOURS) 30000	COLOR DEPTH 1.07B Color (R/G/B 10bit)
ASPECT RATIO 16:9	

VIDEO SIGNAL	
FREQUENCY HORIZONTAL 30K~97KHz	FREQUENCY VERTICAL 24~85Hz

COMPATIBILITY	
PC RESOLUTION (MAX) 3840 x 2160	MAC® RESOLUTION (MAX) 3840 x 2160

CONNECTOR	
USB 2.0 TYPE A 1	USB 3.0 TYPE A 1
USB 3.1 TYPE C 1	CARD READER Micro SD
ETHERNET LAN (RJ45) 1	SPDIF AUDIO OUT 1
3.5MM AUDIO OUT 1	3.5MM AUDIO IN 1
HDMI 2.0 IN 2	BLUETOOTH Bluetooth 4.0

AUDIO	
INTERNAL SPEAKERS 8W (x2)	

POWER	
VOLTAGE AC 100-240V (universal), 50-60Hz	CONSUMPTION (TYPICAL) 140W
STAND-BY <0.5W	

OPERATING CONDITIONS	
TEMPERATURE 32-104° F (0 - 40° C)	HUMIDITY (NON-CONDENSING) 0-90%

ADDITIONAL HARDWARE	
KENSINGTON LOCK SLOT 1	

WEIGHT (IMPERIAL)	
NET (LBS) 9.0	GROSS (LBS) 14.3

WEIGHT (METRIC)	
NET (KG) 4.1	GROSS (KG) 6.5

DIMENSIONS (IMPERIAL) (WXHxD)	
PACKAGING (IN.) 13.1 x 13.5 x 11.0	PHYSICAL (IN.) 10.3 x 10.7 x 6.5


DIMENSIONS (METRIC) (WXHxD)	
PACKAGING (MM) 333.0 x 343.0 x 280.0	PHYSICAL (MM) 261.0 x 271.0 x 166.0

GENERAL	
REGULATIONS FCC, cTUVus, ROHS	PACKAGE CONTENTS X10-4KE Projector, Power Cable, USB-C Cable, Remote Control, WiFi Dongle, Quick Start Guide
WARRANTY Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).	RECYCLE/DISPOSAL Please dispose of in accordance with local, state or federal laws.

DIMENSIONS

15.6 x 12.4 x 6.2 in / 396.0 x 314.0 x 157.0 mm



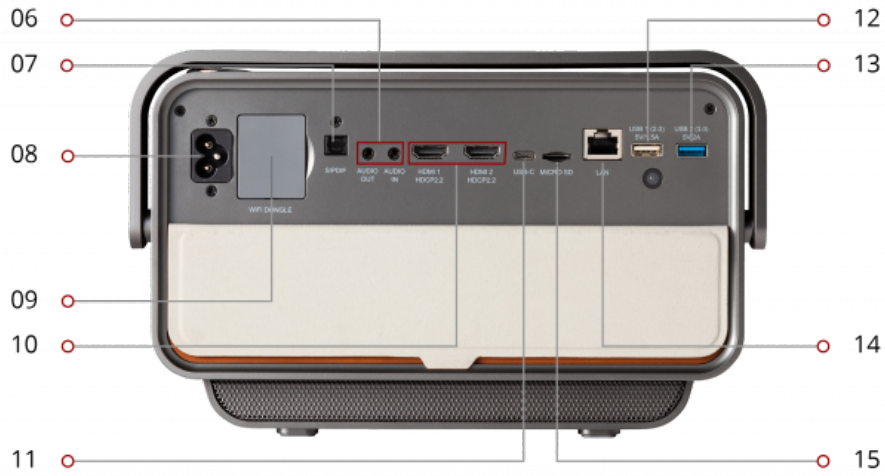

Carrying Handle Projection Lens Harmon Kardon Speakers Menu Controls Safety Sensor Audio In/Out SPDIF
 AC In WiFi Dongle HDMI 2.0 w/HDCP2.2 (x2) USB 3.1 Type C USB 2.0 Type A USB 3.0 Type A LAN
 MicroSD Reader